



 **Imperial**
WHOLESALE
International Stone & Tile

Roca

Abbey

Abbey

The Abbey collection will give any interior the warm charm of untreated wood. A simple, unadorned floor that expresses its naturalness in long planks playing tribute to rustic floors.

Full Body Porcelain

◇ 8"x48" R

≡ 16"x48"R - 12"x36" R



Abbey Fresno 8"x48" R - Suite Abbey Fresno 12"x36" R

This Full Body Porcelain floor tile unfolds in traditional colors and shades: Fresno, Roble, Vison, and Gris. A high quality porcelain proposal with a natural or antislip finish for outdoor or water areas.



Abbey Fresno 8"x48" R - Suite Lines Abbey Fresno 16"x48" R



Abbey Roble 8"x48" R




8"x48" R
19.5x120 cm



Fresno

8"x48" R
FN8ROFP831

8"x48" ABS
FN8RAFP831

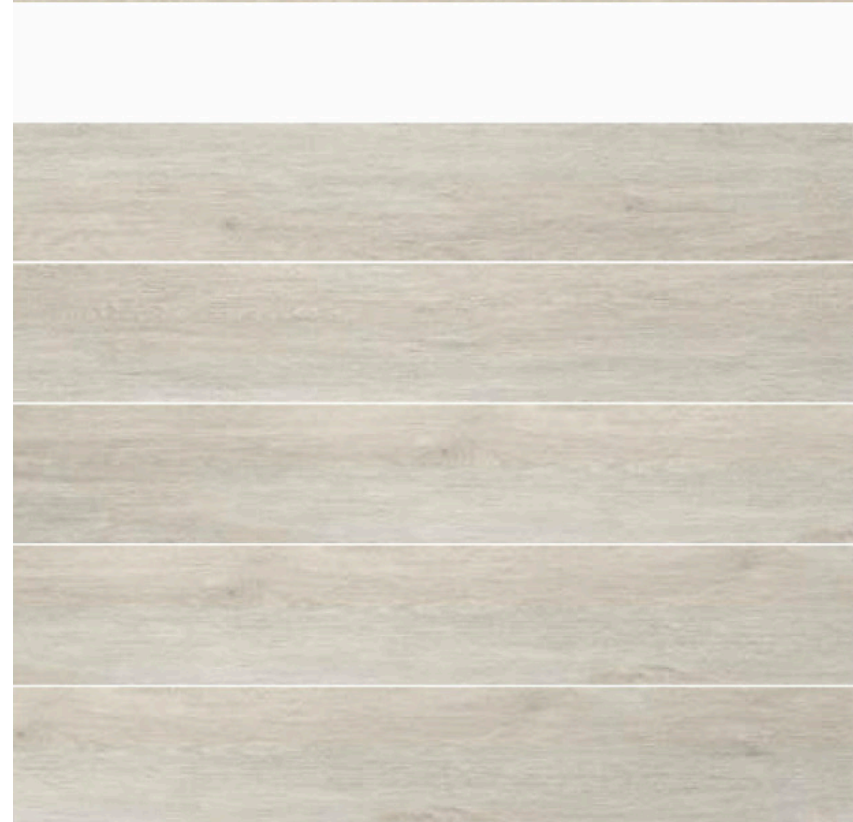

Gris

8"x48" R
FN8ROFP021


8"x48" R ABS
FN8RAFP021



Roble

8"x48" R
FN8ROFP741


8"x48" ABS
FN8RAFP741

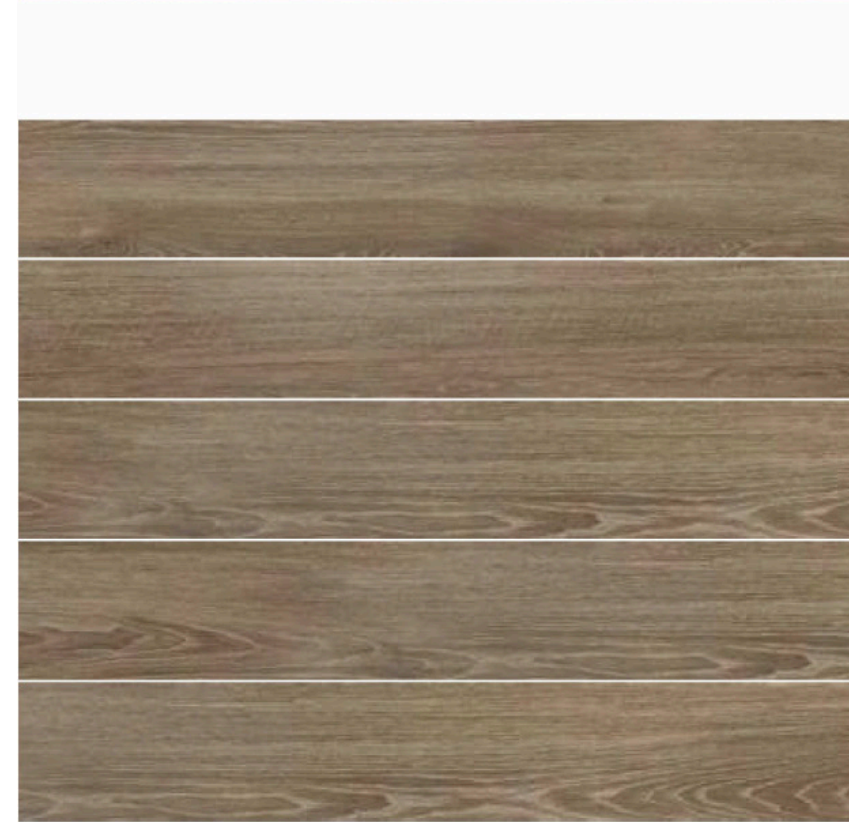

Vison

8"x48" R
FN8T6FP141

8"x48" R ABS
FN86TFP141



16"x48" R
40x120cm

12"x36" R
30x90.2cm



Suite Lines Roble



16"x48" R
FN8T3MC741



Suite Roble



12"x36" R
FOA3TAW741

Technical Specifications (Floor)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 290
Scratch Hardness	MOH's Scale	7
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
Deep Abrasion - Unglazed Tiles	C1243	Pass
PEI - Glazed Tiles	C1027	-
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.50
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications (Wall)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meet or Exceeds
Scratch Hardness	MOH's Scale	-
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V2
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
8"x48"	10.08	4
16"x48"	15.50	3
12"x36"	14.56	5