



Roca

 **Imperial**
WHOLESALE
International Stone & Tile

Bianco Venatino II

Bianco Venatino II

Bianco Venatino II, a timeless masterpiece. The majestic elegance of marble, with its dark and strong veins, creates a dramatic and luxurious feeling in any project.



Bianco Venatino II 35"x35" PO

Glazed & Polished Porcelain

12"x24" 24"x24" 24"x48" 35"x35"




Bianco Venatino II 35"x35" PO




Bianco Venatino II 35"x35" UP

Bianco Venatino II







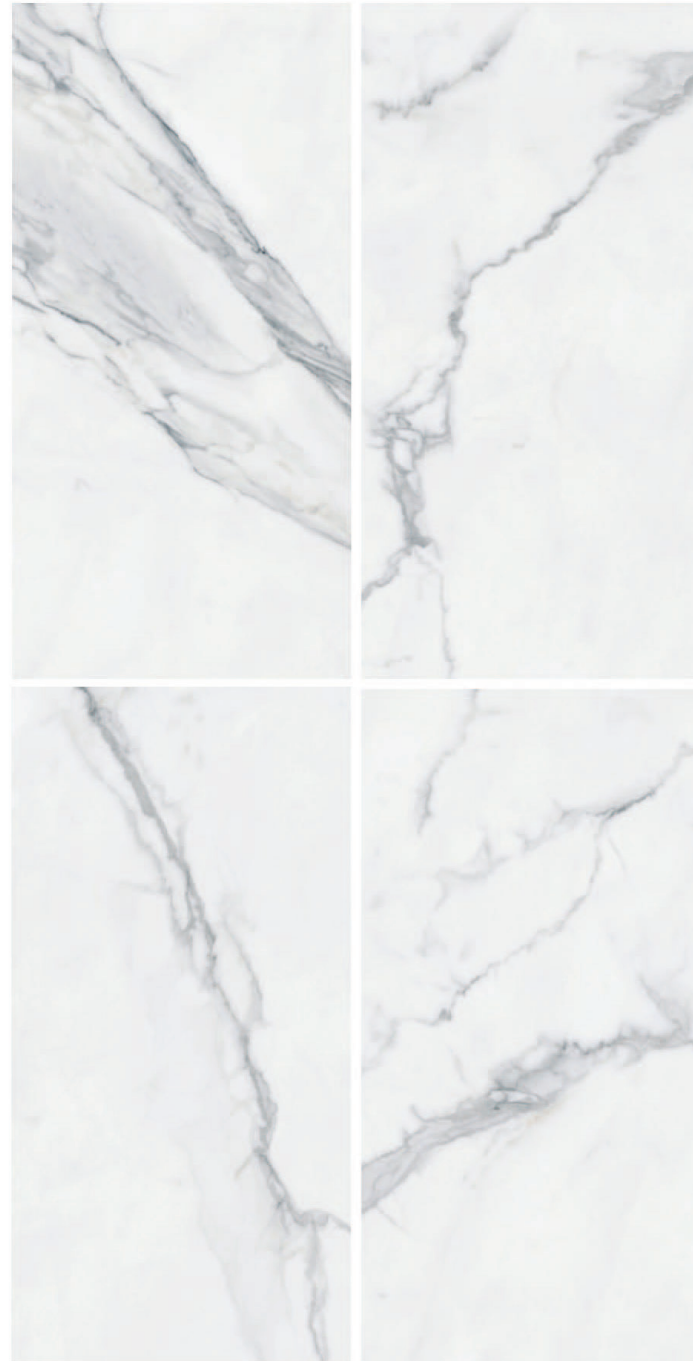



Glazed & Polished Porcelain



35"x35" 90x90cm 24"x48" 60x120cm 24"x24" 60x60cm 12"x24" 30x120cm



Bianco Venatino II

-  **35"x35" R UP**
UFBIAV-35
-  **35"x35" R PO**
UFBIAV-35PO
-  **24"x48" R UP**
UFBIAV-2448
-  **24"x48" R PO**
UFBIAV-2448PO
-  **24"x24" R UP**
UFBIAV-24
-  **24"x24" R PO**
UFBIAV-24PO
-  **12"x24" R UP**
UFBIAV-1224
-  **12"x24" R PO**
UFBIAV-1224PO
-  **13"x13" UP Mosaic**
UFBIAV-13M
-  **3"x12" UP Bullnose**
UFBIAV-S4312

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		POLISHED	UNPOLISHED
Water Absorption	C373	<=0.5	<=0.5
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	3	4
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	3	4
Deep Abrasion - Unglazed Tiles	C1243	Pass	Pass
PEI - Glazed Tiles	C1027	4	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A1371	<=0.40	<=0.40
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Info

Size	SF per carton	PC per carton
12"x24"	18.94	10
24"x24"	19.05	5
24"x48"	15.28	2
35"x35"	17.22	2
13"x13" UP Mosaic	13.15	11
3"x12" UP Bullnose	5.92	24